

FEATURES:


- Conform to TIA/EIA-568.2-D, ISO/IEC 11801-1 and EN50173-1 category 6 specification
- Supports T568 A&B wiring & easy installation
- Termination lid ensures excellent strain relief, cable bend radius control and secure fixing
- Accepts 22-24 AWG solid cables
- IDC contacts: high performance copper alloy with 50µ inch gold plating over nickel in contact area
- Housing material: high impact UL 94V-0 ABS
- Insertion life: 750 plug insertions minimum
- RoHS compliant

**APPLICATIONS:**

- 1000BASE-TX Gigabit Ethernet
- 1000BASE-T Gigabit Ethernet
- 100BASE-TX Fast Ethernet.
- 10BASE-T Ethernet.
- Voice, Video and other applications.

Premium Line Systems GmbH reserves the right to change specifications without prior notice.


DRAWING:

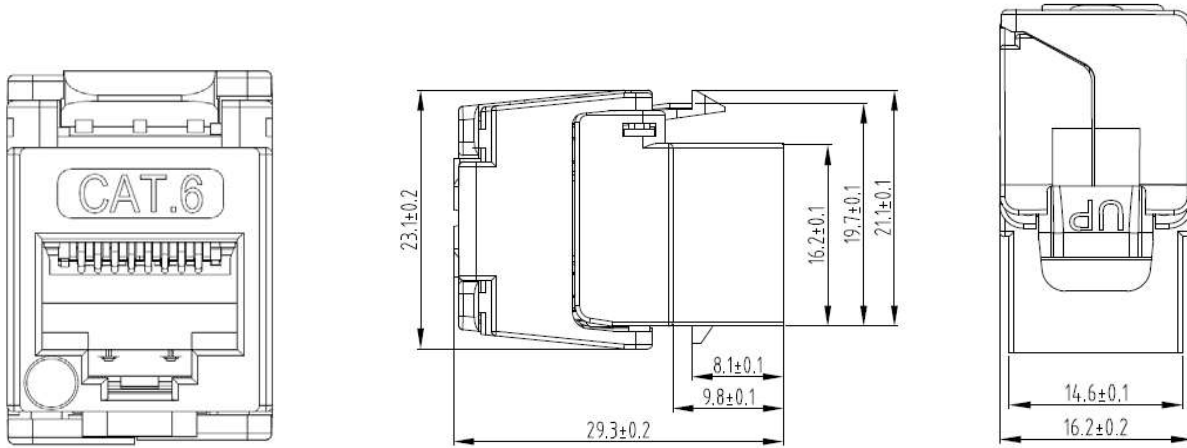


TYPICAL PERFORMANCE:

Channel Performance Data for Cat.6 UTP Solution


NEXT

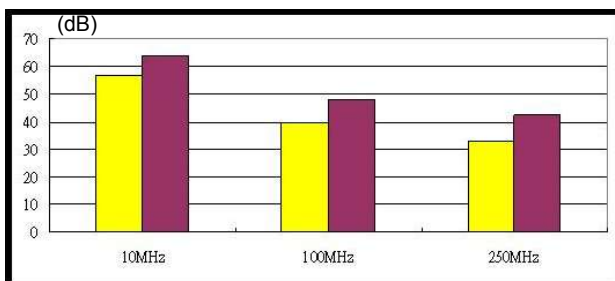


ELFEXT

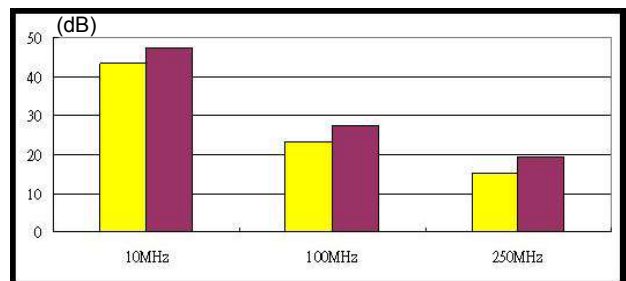

Return Loss

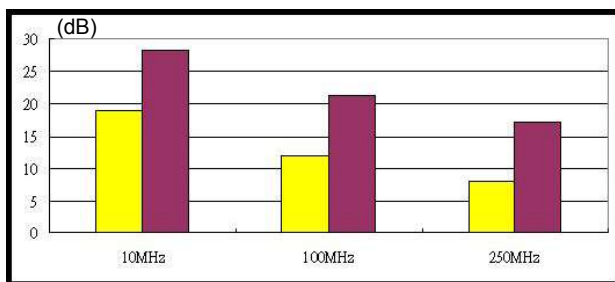

Insertion Loss

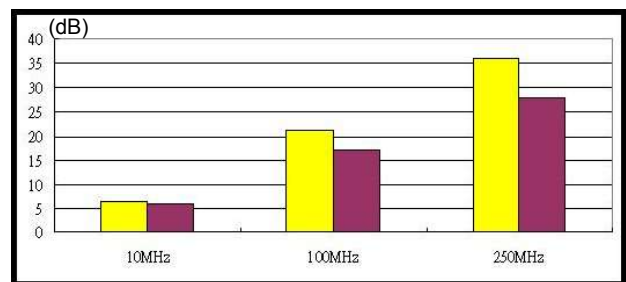

Cat.6 Limit Typical

Premium Line Systems GmbH reserves the right to change specifications without prior notice.

ORDERING INFORMATION:

Part NO.	106124010
Description	Cat.6 180° unshielded toolless keystone jack, white
Packing	1pc/PE bag, 50pcs/box, 500pcs/carton
	carton dimension : 53.8*35.2*27cm weight: G.W. 6.3 kg / N.W. 3.4 kg

Premium-Line Systems GmbH, Rosenheimer Str.89, D-83064 Raubling, Germany

▶ TEL: + 49(0)8035 9836 0 ▶ Fax: + 49(0)8035 9836 22

Premium Line Systems GmbH reserves the right to change specifications without prior notice.