

**FEATURES:**

- Conform to ANSI/TIA-568.2-D, ISO/IEC 11801-1 and EN50173-1 specifications
- Compact design ideal for high density applications: up to 24 keystone jacks can fit into 1U 24 port unloaded patch panel(P/N 171022402)
- Shutter design to protect jack against ingress of dirt
- Supports T568 A&B wiring & easy installation
- Dual IDC connector can accept 22-26 AWG solid cables
- Termination by 110 or Krone tools
- RoHS compliant



**APPLICATIONS:**

- 1000BASE-TX Gigabit Ethernet
- 1000BASE-T Gigabit Ethernet
- 100BASE-TX Fast Ethernet
- 10BASE-T Ethernet
- Voice, Video and other applications

*Premium Line Systems GmbH reserves the right to change specifications without prior notice.*


**CHARACTERISTICS:**

Dielectric Strength	1000V RMS for 1min
Current Rating	1.5Amp Max.
Insulation Resistance	10MΩ Min.
Contact Resistance	2mΩ per contact
Temperature Range	-10° to 60° C
Humidity	10%~90%; non condensing
Material Flame Rating	PC, UL94 V-0
Admissible Conductor	22AWG ~ 26AWG insulation wire
8pin contact in PCB Jack	Phosphor bronze 50μ inch gold plated over nickel in contact area
	Operating life: Minimum 750 insertions
IDC Contacts	100μ inch nickel plated over phosphor bronze; Operating life: Minimum 250 re-terminations


**TYPICAL PERFORMANCE:**

Channel Performance Data for Cat.6 UTP Solution


**NEXT**

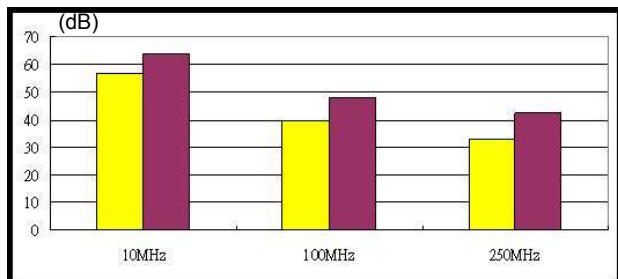


**ELFEXT**

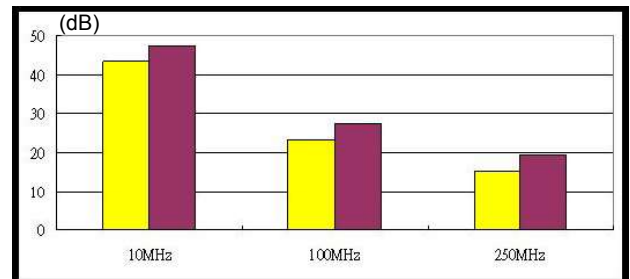

**Return Loss**

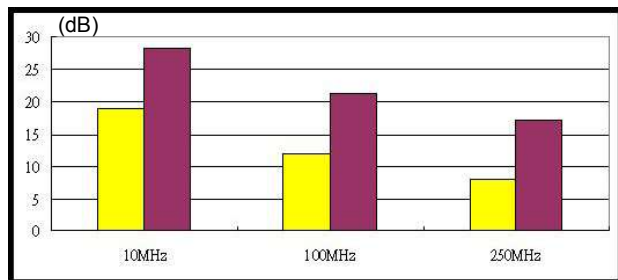


**Insertion Loss**

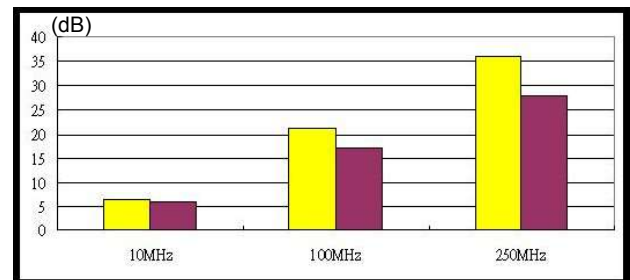

Cat.6 Limit █ Typical █

Premium Line Systems GmbH reserves the right to change specifications without prior notice.

**DRAWING:**

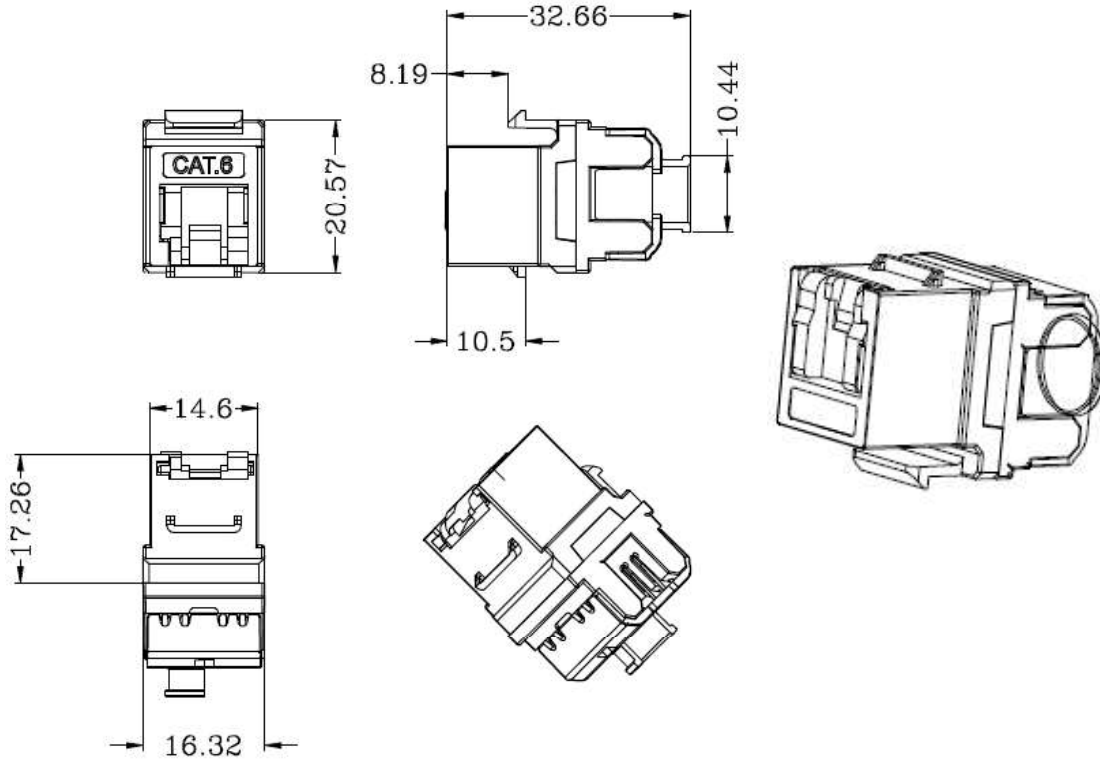

**ORDERING INFORMATION:**

Part No.	106721010
Description	Cat.6 180° unshielded slim keystone jack with shutter, dual type IDC, white
Packing	1pc/PE bag, 50pcs/box, 500pcs/carton
carton size	53.8*35.2*27 cm
weight:	N.W. 5.0 kg G.W. 9.1 kg

Premium-Line Systems GmbH, Rosenheimer Str.89, D-83064 Raubling, Germany

► TEL: + 49(0)8035 9836 0 ► Fax: + 49(0)8035 9836 22

*Premium Line Systems GmbH reserves the right to change specifications without prior notice.*