

FEATURES:


- Supports T568 A&B wiring and easy installation
- Dual type IDC connector can accept 22-26 AWG solid and stranded cables
- Uniform standard German type
- Color: RAL9010 or RAL1013
- Terminate using 110 or Krone tools
- 45°inclined port structure, plug-in-easy
- Dust-proof shutter design
- Products include back box(80*80*40mm)

Compliant with Cat.6A requirements as :

- ANSI/TIA-568.2-D:2018
- EN50173-1:2018
- ISO/IEC 11801-1 Class Ea:2017

Compliant with safety standard as:

- RoHS (EU Directive 2011/65/EC)

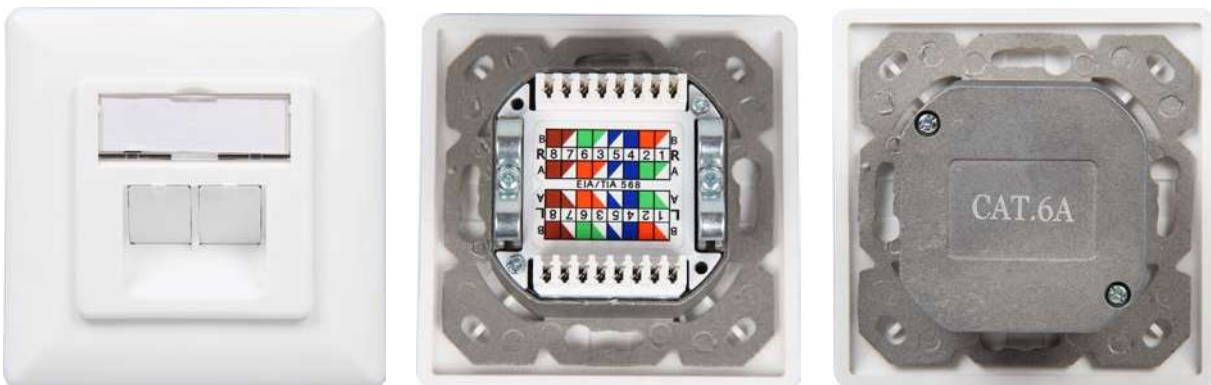**APPLICATION:**

- 10GBASE-T Ethernet
- 1000BASE-TX Gigabit Ethernet
- 1000BASE-T Gigabit Ethernet
- 100BASE-TX Fast Ethernet.
- 10BASE-T Ethernet
- Voice, Video and other applications.

Premium Line Systems GmbH reserves the right to change specifications without prior notice.


CHARACTERISTICS:

Dielectric Strength	1000V RMS for 1min
Current Rating	1.5Amp Max.
Insulation Resistance	10MΩ Min.
Contact Resistance	2mΩ per contact
Temperature Range	-10° to 60° C
Humidity	10%~90%; non condensing
Material Flame Rating	UL94 V-0
Plate	ABS
Top & Bottom Case	Zinc die casting alloys
Jack	45° 8P8C RJ45 jack
	Phosphor bronze 6μ inch gold plated over nickel in contact area
	Shielded: bronze with nickel plated
	Plastic housing: engineering thermoplastic
IDC	Operating life: Minimum 750 insertions
	Dual 8pin IDC
	Main body: PC
	IDC Contacts:100μ inch nickel plated over phosphor bronze
	Operating life: Minimum 250 Re-terminations
Dimension(L*W*H)	80.0*80.0*34.4mm


TYPICAL PERFORMANCE:

Channel performance data for 10G Cat6A shielded solution

PSNEXT

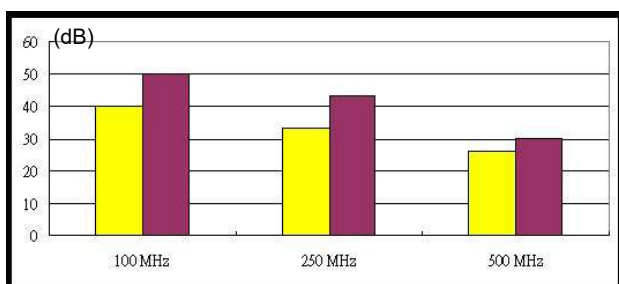


PSANEXT

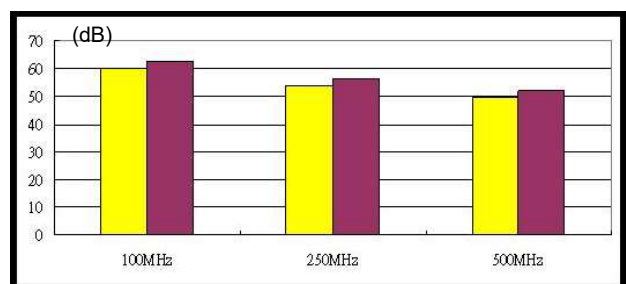


Premium Line Systems GmbH reserves the right to change specifications without prior notice.

Return Loss

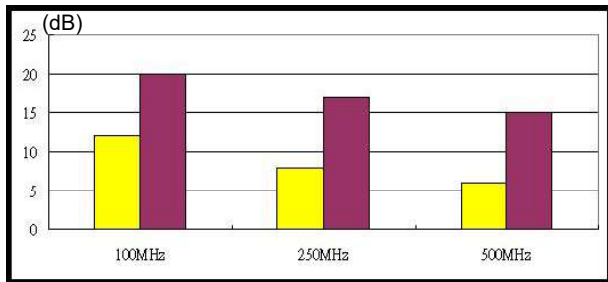


■ Cat.6A Limit ■ Typical

Insertion Loss

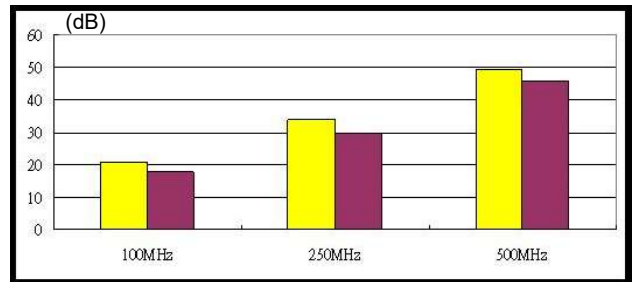

DRAWING:

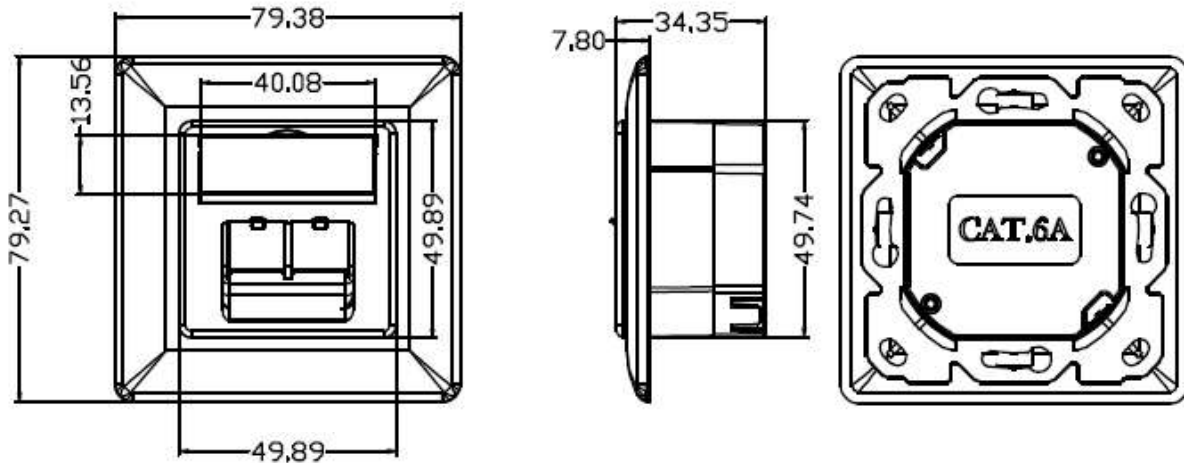

ORDERING INFORMATION:

Part NO.	1119212x1		
Description	Cat.6A shielded compact outlet with shutter, 80x80mm		
x, color	8: RAL1013 (oyster white)	9: RAL9010 (pure white)	
Packing	1pc/ box, 64pcs/carton		
	carton dimension 37*37*27.5cm	weight N.W. 12.4 KG	G.W. 13.4 KG

Premium-Line Systems GmbH, Rosenheimer Str.89, D-83064 Raubling, Germany

► TEL: +49(0)8035 9836 0 ► Fax: +49(0)8035 9836 22

Premium Line Systems GmbH reserves the right to change specifications without prior notice.