


Part No: 392100L5-E00
Description: WF100 5 Core + Earth 75 Ohm Low Smoke & Fume (LSF) Black Coaxial Cable

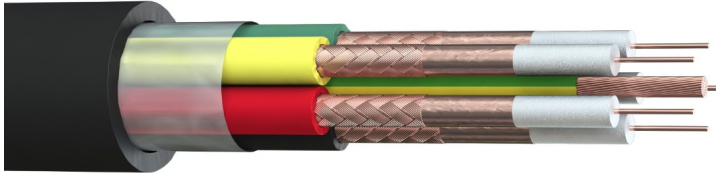

WF100 Coax Construction

Conductor Material : Solid Bare Copper
 Conductor Size : 1/1.00 mm
 Dielectric : Foam Polyethylene (FPE)
 Diameter of Dielectric : 4.8 mm
 1st Screen Material : Plain Copper Foil
 2nd Screen Material : Bare Copper Wire Braid (>40% Coverage)
 Outer Sheath Material : Low Smoke & Fume (LSF)
 Outer Sheath Colour : Black, Red, Yellow, Green, White

Central Earth Conductor

Conductor Material : Bare Copper
 Conductor Size : 4mm², Class 5
 Sheath Material : Low Smoke & Fume (LSF)
 Sheath Colour : Green/Yellow

Overall Construction

Outer Sheath Material : Low Smoke & Fume (LSF)
 Outer Sheath Colour : Black

Electrical Characteristics

Impedance : 75 Ω ± 3
 Capacitance : 55 pF / m ± 2
 Velocity of Propagation : 81 %
 Conductor Resistance @ 20°C : ≤ 26 Ω / km
 Screen Resistance @ 20°C : ≤ 15 Ω / km

Attenuation @ 20°C

Frequency (MHz)	Attenuation (dB/100m)	Frequency (MHz)	Attenuation (dB/100m)
5	< 1.6	460	< 15.0
50	< 4.6	860	< 19.5
100	< 6.5	1000	< 21.5
200	< 9.5	1750	< 29.0

Return Loss @ 20°C

Frequency (MHz)	Return Loss (dB)
5-470	≥ 23
470-862	≥ 20
862-2150	≥ 18

Physical Characteristics

Overall Diameter : 21.0 mm (±0.5mm)
 Bending Radius : 10 x OD
 Temperature Rating : Fixed -15°C to +70°C Flexing -5°C to 70°C
 Weight : 630 kg/km

Standards

Screening Class : BS EN 50117
 Flame Retardant : BS EN 60332-1-2
 RoHS3 Compliant : Yes
 CE Compliant : LVD (2014/35/EU), CPR (305/2011)
 CPR Classification : Eca (EN50575:2014+A1:2016)

FS Cables Ltd | 01727 840 841
 Export Sales | +44 1727 849 841

sales@fscables.com | www.fscables.com
 sales@fscglobal.com | www.fscglobal.com

Part Number: 392100L5-E00
 Date: 31/01/2020
 Revision: 1.1
 Author: GB Checked: GB
 Page Number: 1 of 1