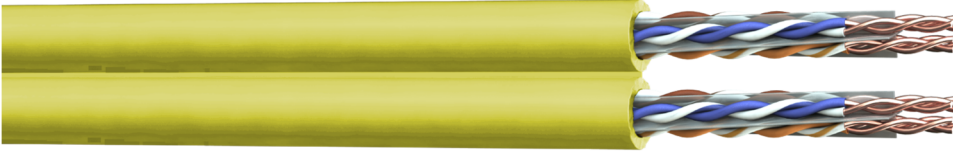


Part No: C6HR09SHOTGUN-C19
Description: The TruLan Cat 6 U/UTP shotgun/figure of 8 cable in Low Smoke Halogen Free (LSHF) is the ideal choice for high speed data networks across a home or building.

Construction

Conductor : Bare Copper
AWG : 23(1)
Insulation Material : High Density Polyethylene (HDPE)
Number of Pairs : 4
Pair Identification : Blue, Blue/White; Orange, Orange/White
 : Green, Green/White; Brown, Brown/White
Outer Sheath Material : Low Smoke Halogen Free (LSHF)
Outer Sheath Colour : Yellow

Electrical Characteristics

Max. Conductor Resistance @ 20°C : ≤ 9.5 Ω/100m
Max. Resistance Unbalanced : ≤ 2.5 %
Nominal Impedance (1-100MHz) : 100 ± 15 Ω
Mutual Capacitance : ≤ 5.6nF/100m
Capacitance Unbalanced to Earth : ≤ 330 pF/ 100m
NVP : 68.5 %
Max. Delay Skew : ≤ 45 nS/ 100m
Voltage Rating EN 50525-1 : 450/750V*
Test Voltage : 2.5kV (AC)
 *Suitable for installation where Band II 450/750v cables are present. Not suitable for connection to mains supply

Physical Characteristics

Overall Diameter : 6.2 x 13.4 ± 0.5mm
Bend Radius : Fixed 4 x OD Flexing 8 x OD
Temperature Rating : Fixed -20°C to 60°C Flexing -10°C to 60°C
Weight : 94 kg/km

Transmission Performance

Frequency	1	4	10	16	20	31.25	62.5	100	200	250	MHz
Attenuation	1.9	3.5	5.5	7.0	7.9	10.0	14.4	18.6	27.4	31.1	≤ dB
Return Loss	19.1	21.0	21.0	20.0	19.5	18.5	16.0	14.0	11.0	10.0	≥ dB
NEXT	65.0	64.1	57.8	54.6	53.1	50.0	45.1	41.8	36.0	35.3	≥ dB
PS NEXT	62.0	61.8	55.5	52.2	50.7	47.5	42.7	39.3	34.3	32.7	≥ dB
ACRF	64.2	52.1	44.2	40.1	38.2	34.3	28.3	24.2	18.2	16.2	≥ dB
PSACRF	61.2	49.1	41.2	37.1	35.2	31.3	25.3	21.2	15.2	13.2	≥ dB

Standards

Flame Retardant : BS EN 60332-1-2	Low Smoke Generation : BS EN 61034-2
Halogen Gas Emission : BS EN 60754-1&2	Manufactured in accordance to : TIA/EIA 568-C.2, ISO/IEC 11801
RoHS3 Compliance : Yes	CPR Classification : Cca s1, d0, a1
CE Compliant : LVD (2014/35/EU), CPR (305/2011)	(EN50575:2014+A1:2016)