


Firetuf™ OFC-UT-CST Fire resistant Armoured Central Tube Cable

Indoor/Outdoor steel tape armoured (CST) double LSHF-FR sheathed optical cable with 2 – 24 fibres.
VDE: A/I-DQ(ZN)H(SR)H



OFC-UT-CST 1X24E9/125

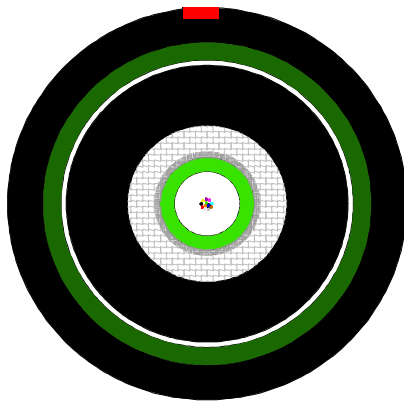

3rd party verification of the fire tests by BUREAU VERITAS December 2014

Application and installation

The application of this cable is circumstances where a very high degree of fire safety is required as the cable will function during a fire, has limited fire spread, has limited smoke generation and is halogen free. The typical installation environment is indoor and indoor/outdoor in and between public buildings, in tunnels, metro lines and other places where one need very high degree of fire safety and support for critical communication. This cable is also suitable for shipboard application. The steel tape armoring makes the cable rodent proof. The primary means of installation are on cable ladders, raceways and cable trays. The cable may however also be directly buried. The cable can be installed outdoor in the open, but shall be not be installed directly exposed to the sun.

Standards

ISO 11801, EN 50173, IEC 60794-1, IEC 60794-2-

Fire rating

Fire resistance tests

IEC 60331-25 (120)	Fire resistance: 120 minutes at 750 °C (No fibre break)
EN 50200 PH 120	Fire resistance with fire and impact 120 minutes 830 °C (No fibre break)
EN 50200 ANNEX E PH 30	Fire resistance until 15 minutes of fire and impact alone , followed by 15 minutes of fire , impact and water spray at 830 °C (No fibre break)
BS 8434 - 2	Fire resistance until 60 minutes of fire and impact alone , followed by 60 minutes of fire , impact and water spray at 930 °C (No fibre break)

Flame retardant tests

IEC 60332-1-2	Single vertical wire test
---------------	---------------------------

Flame propagation test

IEC 60332-3-24 = IEC 332-3C	Vertically-mounted bunched wires and cables
-----------------------------	---

Halogen acid & gas tests

IEC 60754-1	No halogens
IEC 60754-2	No acid matters

Smoke emission tests

IEC 61034-2	No dense smoke
-------------	----------------

Firetuf™ OFC-UT-CST Fire resistant Armoured Central Tube Cable

Construction

Loose tube	Ø4.0 mm jelly filled loose tube green colored with up to 2 - 24 fibres		
Fibre colour code	1	Red	13 Yellow w/mark per 100 mm
	2	Green	14 White w/mark per 100 mm
	3	Blue	15 Grey w/mark per 100 mm
	4	Yellow	16 Turquoise w/mark per 100 mm
	5	White	17 Orange w/mark per 100 mm
	6	Grey	18 Pink w/mark per 100 mm
	7	Brown	19 Yellow w/mark every 50 mm
	8	Violet	20 White w/mark every 50 mm
	9	Turquoise	21 Grey w/mark every 50 mm
	10	Black	22 Turquoise w/mark every 50 mm
	11	Orange	23 Orange w/mark every 50 mm
	12	Pink	24 Pink w/mark every 50 mm
Fire barrier	Tape(s)		
Strength member	Water blocked E-Glass fibre elements		
Ripcord	1		
Inner sheath	2.5 mm black LSHF-FR sheath according to EN 50290-2-27, UV stabilised		
Armouring	Coated and corrosion protected corrugated steel tape (CST), thickness 0.15 mm		
Ripcord	1		
Outer sheath	1.4 mm black with red stripe LSHF-FR sheath according to EN 50290-2-27, UV stabilised		
Print legend	Draka Firetuf OFC-UT-CST CI-LSHF I/O <fibre count> <fibre type> <fibre brand> <item number> <batch number> ISO11801 EN50173-1 IEC60794-1 IEC61034-2 IEC60754-1+2 IEC60332-3-24 EN50200e PH30 EN50200 PH120 BS8434-2 IEC60331-25 <Transmission class> Prysmian Group		

Physical properties

IEC 60794-1

Property	Test method	Value
Nominal outer diameter	-	17 mm
Nominal weight	-	351 kg/km
Maximum installation tensile strength	E1	3500 N ($\Delta l/l$ fibre $\leq 0.5\%$, $\Delta\alpha$ reversible) *
Compressive strength (crush)	E3	5000 N / 100 mm, max 5 min ($\Delta\alpha$ reversible) *
Impact	E7	50 Nm, No fibre break, 3 impacts, r=300mm,
Torsion	E7	5 cycles ± 1 turn
Kink	E10	The cables do not form a kink when a loop is drawn together to a diameter of 20xD (Cable diameter) mm
Min. bending radius, unloaded	E11	R = 255 mm
Min. bending radius, loaded	-	R = 340 mm
Temperature range	F1	Storage: -40°C to +80°C Installation: 0°C to +50°C Operation: -40°C to +70°C. ($\Delta\alpha$ 0.05 dB/km)**
Water penetration	F5B	No water leakage after 24 hour, sample=3m, water=1m,

* Values for single-mode fibres, all optical measurements performed at 1550 nm,

** Values for multi-mode fibres, all optical measurements performed at 850 nm or 1300 nm with 0.10 dB as threshold (tensile and crush will not be performed for MM fibres)

Firetuf™ OFC-UT-CST Fire resistant Armoured Central Tube Cable

Prysmian group material code	Prysmian Group material description	Fibre count	Fibre type	Fibre data sheet
	OFC UT CST 12 OM3 C31-1	12	MaxCap-BB-OM3	C31
	OFC UT CST 24 OM3 C31-1	24	MaxCap-BB-OM3	C31
	OFC UT CST 12 OS2 C03-1	12	ESMF single mode G.652.D	C03
	OFC UT CST 24 OS2 C03-1	24	ESMF single mode G.652.D	C03

Delivery form: Wooden drum with protection.
Standard delivery length: 4 km with a tolerance of +- 5%.

© PRYSMIAN GROUP 2011, All Rights Reserved

All sizes and values without tolerances are reference values. Specifications are for product as supplied by Prysmian Group: any modification or alteration afterwards of product may give different result.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian Group. The information is believed to be correct at the time of issue. Prysmian Group reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by Prysmian Group.

C02: General purpose 62.5 μm fibre

Properties of cabled OM1 fibre for use at 850 nm and at 1300 nm

General and application

This fibre is a graded-index multimode fibre suitable for transmission speeds of up to 10 Gbps (33m 10GBASE-SR). It has 62.5 μm core and 125 μm cladding diameter. The fibre is designed for use at 850 and 1300 nm.

This fibre is suitable for use in premises wiring application like LAN's with video, data and or voice services using LED, VCSEL and Fabry-Perot laser sources.

Standards

IEC 60793-2-10 Category A1b	ISO/IEC 11801 category OM1
EN 60793-2-10: type A1b	IEEE 802.3 - 2002 with amendment 802.3ae - 2002
TIA/EIA-492 AAAA	ANSI/TIA/EIA-568.B.3 - 2000
EN 50173-1:2007 category OM1	IBM™ Fibre Optic Channel Links; ESCON™

Cabled Fibre Attenuation

Attribute	Measurement method	Units	Limits
Attenuation limit according to IEC 60793-2-10, 850 nm	IEC 60793-1-40	dB/km	≤ 3.5
Attenuation limit according to IEC 60793-2-10, 1300 nm	IEC 60793-1-40	dB/km	≤ 1.5

Optical Specifications (Bare Fibre)

Attribute	Measurement method	Units	Limits
Attenuation at 850 nm	IEC 60793-1-40	dB/km	≤ 2.9
Attenuation at 1300 nm	IEC 60793-1-40	dB/km	≤ 0.6
Point Discontinuity at 850 nm and 1300 nm	IEC 60793-1-40	dB	≤ 0.1

Bending Loss

Mandrel Radius = 37.5 mm, 100 turns at 850/1300 nm	IEC 60793-1-40	dB	≤ 0.5
--	----------------	----	------------

Bandwidth

Overfilled (OFL) modal bandwidth at 850 nm	IEC 60793-1-41	MHz • km	≥ 200
Overfilled (OFL) modal bandwidth at 1300 nm	IEC 60793-1-41	MHz • km	≥ 600

C02: General purpose 62.5 μm fibre

Geometrical properties

Attribute	Measurement method	Units	Limits
Core diameter	IEC 60793-1-20	μm	62.5 ± 2.5
Cladding diameter	IEC 60793-1-20	μm	125.0 ± 1.0
Cladding non-circularity	IEC 60793-1-20	%	≤ 1.0
Core non-circularity	IEC 60793-1-20	%	≤ 5
Core-cladding concentricity error	IEC 60793-1-20	μm	≤ 1.5
Primary coating diameter – uncoloured	IEC 60793-1-21	μm	242 ± 7
Primary coating diameter - coloured	IEC 60793-1-21	μm	250 ± 15
Primary coating non-circularity	IEC 60793-1-21	%	≤ 6
Primary coating-cladding concentricity error	IEC 60793-1-21	μm	≤ 10

Mechanical properties

Attribute	Measurement method	Units	Limits
Proof stress level	IEC 60793-1-30	GPa	≥ 0.7 (≈ 1 %)
Typical average strip force	IEC 60793-1-32	N	≥ 1.3 ≤ 3.0
Peak strip force	IEC 60793-1-32	N	≥ 1.3 ≤ 8.9

Group index of refraction

Group index of refraction at 850 nm	IEC 60793-1-22	-	1.496
Group index of refraction at 1300 nm	IEC 60793-1-22	-	1.491

© PRYSMIAN GROUP 2012, All Rights Reserved

All sizes and values without tolerances are reference values. Specifications are for product as supplied by Prysmian Group: any modification or alteration afterwards of product may give different result.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian Group. The information is believed to be correct at the time of issue. Prysmian Group reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by Prysmian Group.